

Work Order ID 71125

Thursday, June 23, 2011 11:06:25 AM



Page 1

Item ID: D4038-044

Accept



Setup Start



Revision ID:

Stop



Item Name: Angle Assembly, Aft, RH

Start Date: 6/23/2011 Start Qty: 2.00



Cust Item ID:

Required Date: 7/6/2011 Req'd Qty: 2.00



Customer:

Reference:

Run Start



Approvals: Process Plan: CL Date: 11/04/23 Tooling: _____ Date: _____

QC: _____ Date: _____ SPC (Y/N): _____ Date: _____

Stop



Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
Draw Nbr	Revision Nbr								
D4038	E								
100	Pick Kit	0.00							
Packaging	Memo	0.00							
Packaging									
110		0.00							
Small Fab	Memo	0.00							
Small Fab	Assemble as per dwg								
120	QC5- Inspect part completeness to step on W/O	0.00							
QC	Memo	0.00							
Quality Control									

EP 11/07/08 (2)

EP 11/07/08 (2)

QC
244

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Work Order ID 71125

Thursday, June 23, 2011 11:06:25 AM



Page 2

Item ID: D4038-044

Accept



Setup Start



Revision ID:

Stop



Item Name: Angle Assembly, Aft, RH

Start Date: 6/23/2011 Start Qty: 2.00



Cust Item ID:

Required Date: 7/6/2011 Req'd Qty: 2.00



Customer:

Reference:

Run Start



Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____

Stop



QC: _____ Date: _____ SPC (Y/N): _____ Date: _____

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
130 	Identify as per dwg & Stock Location: <u>BS</u>	0.00							
Packaging	Memo	0.00							
Packaging									
140 	QC21- Final Inspection - Work Order Release	0.00							
QC	Memo	0.00							
Quality Control									

11/7/8 (20) SP

11/7/11 J

ME 11-07-08

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Thursday, June 23, 2011 11:06:22 AM






Page 1

Parent Item Name: Angle Assembly, Aft, RH

Required Date: 7/6/2011

Required Qty: 2.00

Comments: IPP REV:A NEW ISSUE 10-04-21 JLM VERIFIED BY:EC IPP
Rev:B 11.01.31 as per dwg rev.c DD verified by:ec

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D4038-4 		Manufactured	No			100	Each	0.0000	1	2		4/07/08	
Angle, Aft, RH													
D4038-8 		Manufactured	No			100	Each	0.0000	1	2		4/07/08	
Block													
D4038-12 		Manufactured	No			100	Each	0.0000	1	2		4/07/08	
Block													
AN3-14A 		Purchased	No			100	Each	144.0000	2	4		4/07/08	
Bolt													
				<u>Location</u>		<u>Loc Qty</u>		<u>Loc Code</u>					
				ST352		144							
				117688		44							
				117872		100							
MS21042L3 		Purchased	No			100	Each	2,025.000	2	4		4/07/08	
Nut													
				<u>Location</u>		<u>Loc Qty</u>		<u>Loc Code</u>					
				ST300		2025							
				116549		325							
				117441		800							
				117601		400							
				117885		500							

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Picklist Print

Thursday, June 23, 2011 11:06:22 AM

Page 2

Work Order ID: 71125

Parent Item: D4038-044

Parent Item Name: Angle Assembly, Aft, RH



Start Date: 6/23/2011

Required Date: 7/6/2011

Start Qty: 2.00

Required Qty: 2.00

NAS1149D0363J

Purchased

No

100

Each

3,737.000

4



Washer



8
4/11/07/08

Location

Loc Qty

Loc Code

ST298

3737

117291

737

117505

500

117601

500

118077

2000

8

Thursday, June 23, 2011 11:06:23 AM

Shop Packet Print

Page 2

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____


Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			


NOTE: Date & initial all entries

ITEM NO.	QTY. -041	QTY. -042	PART NUMBER	DESCRIPTION
1	X		D4038-041	ANGLE ASSEMBLY, FWD, LH
2		X	D4038-042	ANGLE ASSEMBLY, FWD, RH
3	1		D4038-1	ANGLE, FWD, LH
4		1	D4038-2	ANGLE, FWD, RH
5	1		D4038-5	BLOCK
6		1	D4038-6	BLOCK
7	1		D4038-9	BLOCK
8		1	D4038-10	BLOCK
9	2	2	AN3-14A	BOLT
10	2	2	MS21042L3	NUT
11	4	4	NAS1149D0363J	WASHER (AN960JD10)

SHOP COPY
RETURN TO
ENGINEERING
UNCONTROLLED COPY
NO. ~~SUBJECT TO AMENDMENT~~
WITHOUT NOTICE
WORK ORDER
NO. 71125
C211/06/23

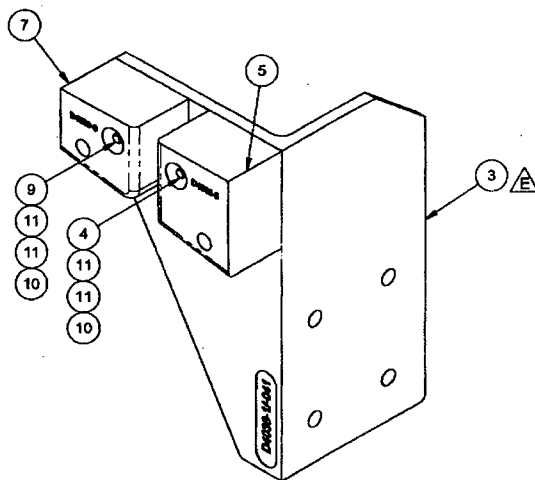

D4038-041 ANGLE ASSEMBLY, FWD, LH

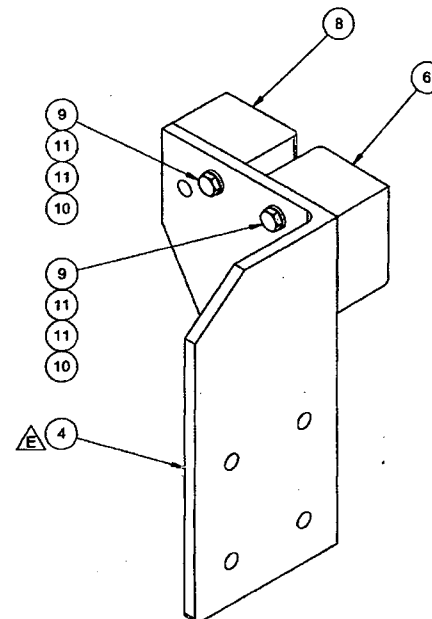

D4038-042 ANGLE ASSEMBLY, FWD, RH


RELEASED
2011-04-31
JMB

NOTES:


- 1) MATERIAL: N/A
- 2) FINISH: POWDER COAT "WHITE" (4.3.5.1) PER DART QSI 005 4.3
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: -041 - 1.75 lbs
-042 - 1.74 lbs

E	1.19 X 1.00 CHAMFER WAS R1.00. REF: NCR11-543.	MB	11.04.11
D	REVISED D4038-7/8-11/12 AS FOLLOWS: 1.87 WAS 1.73 (C7-8); 2.14 WAS 2.00 (C4-9); 2.19 WAS 2.00 (C7-10); 1.86 WAS 1.73 (C4-10); 1.52 WAS 1.38 (C7-13); 1.78 WAS 1.65 (C4-13); 1.77 WAS 1.65 (C7-14); 1.49 WAS 1.38 (C4-14). REASON: NCR11-456.	MB	11.03.03
C	REVISED D4038-3/4 AS FOLLOWS: 0.589 WAS 0.714 (B2-5, B4-6); D4038-043/044 ARE AFFECTED. REASON: NCR11-398.	MB	11.01.20
B	REVISED DIMENSIONS ALL SHEETS. ADD Ø0.316 HOLES IN -1/2-3/4 PARTS, ADD RADIUS TO -1/2-3/4 PARTS	HS	10.01.05
A	NEW ISSUE	HS	09.12.14
REV.	DESCRIPTION	BY	DATE
DESIGN			
DRAWN			
CHECKED			
MFG. APPR.			
APPROVED			
DE APPR.			
DATE	11.04.11		
DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA DRAWING NO. D4038 TITLE BRACKET COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			
		REV. E	SHEET 1 OF 14
		SCALE	NTS

ITEM NO.	QTY. -043	QTY. -044	PART NUMBER	DESCRIPTION
1	X		D4038-043	ANGLE ASSEMBLY, AFT, LH
2		X	D4038-044	ANGLE ASSEMBLY, AFT, RH
3	1		D4038-3	ANGLE, AFT, LH
4		1	D4038-4	ANGLE, AFT, RH
5	1		D4038-7	BLOCK
6		1	D4038-8	BLOCK
7	1		D4038-11	BLOCK
8		1	D4038-12	BLOCK
9	2	2	AN3-14A	BOLT
10	2	2	MS21042L3	NUT
11	4	4	NAS1149D0363J	WASHER (AN960JD10)

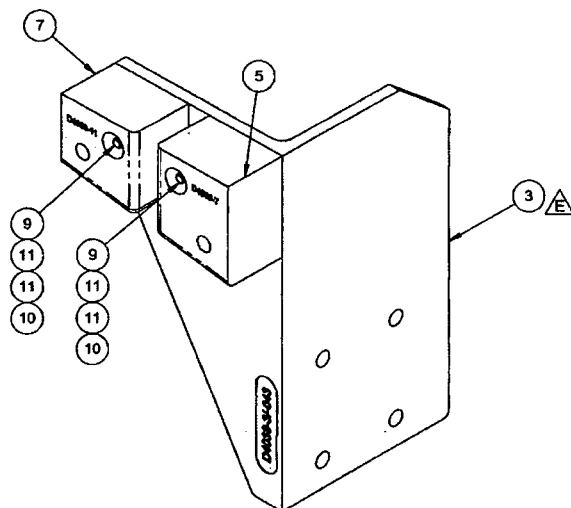

D4038-043 ANGLE ASSEMBLY, AFT, LH

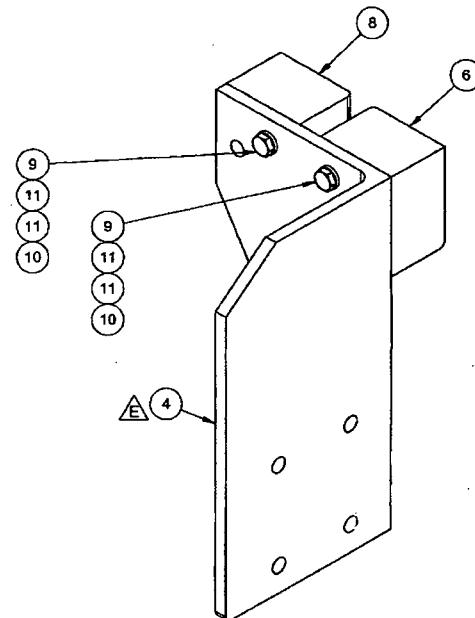





D4038-044 ANGLE ASSEMBLY, AFT, RH

NOTES:

- 1) MATERIAL: N/A
- 2) FINISH: POWDER COAT "WHITE" (4.3.5.1) PER DART QSI 005 4.3
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: N/A
- 7) WEIGHT: -043 - 1.96 lbs
-044 - 1.74 lbs

RELEASED
2011-04-21

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO. D4038	REV. E
MFG. APPR.		TITLE	SHEET 2 OF 14
APPROVED		BRACKET	SCALE
DE APPR.			NTS
DATE	11.04.11	<small>COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSES OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

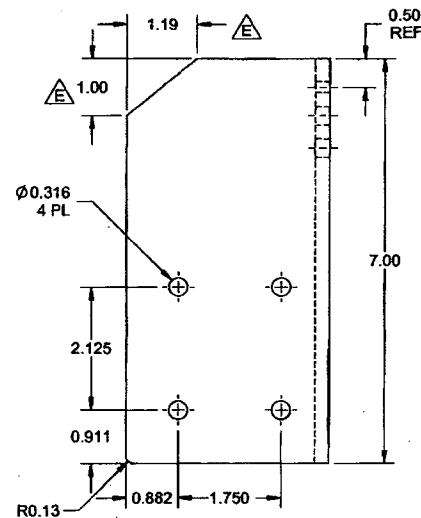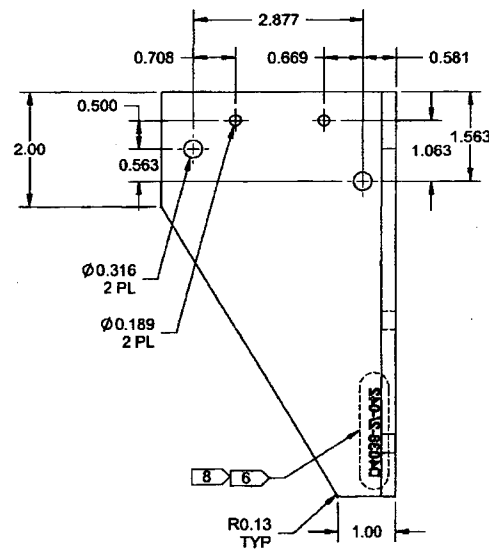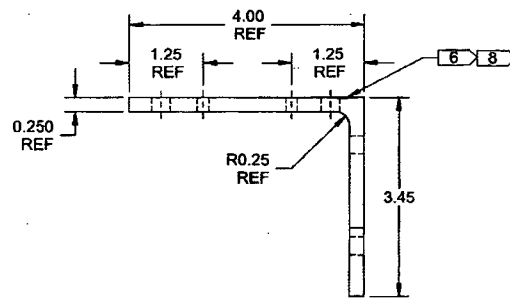


D4038-2 ANGLE, FWD, RH


NOTES:


- 1) MATERIAL: 6061-T6/T6510/T6511 ALUMINUM ANGLE, 4.000 X 4.000 X 0.250
PER AMS-QQ-A-200/8
REF DART SPEC M6061T6A4.000XW250
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN (FAR SIDE ONLY) TO MAX
DEPTH OF 0.010 IN 0.18 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 1.03 lbs
- 8) SPOT FACE MAX DEPTH OF 0.010 PRIOR TO MARKING

RELEASED
2011-04-22
JMD

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO. D4038	REV. E
MFG. APPR.		TITLE	SHEET 4 OF 14
APPROVED		BRACKET	SCALE
DE APPR.			NTS
DATE	11.04.11	<small>COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	


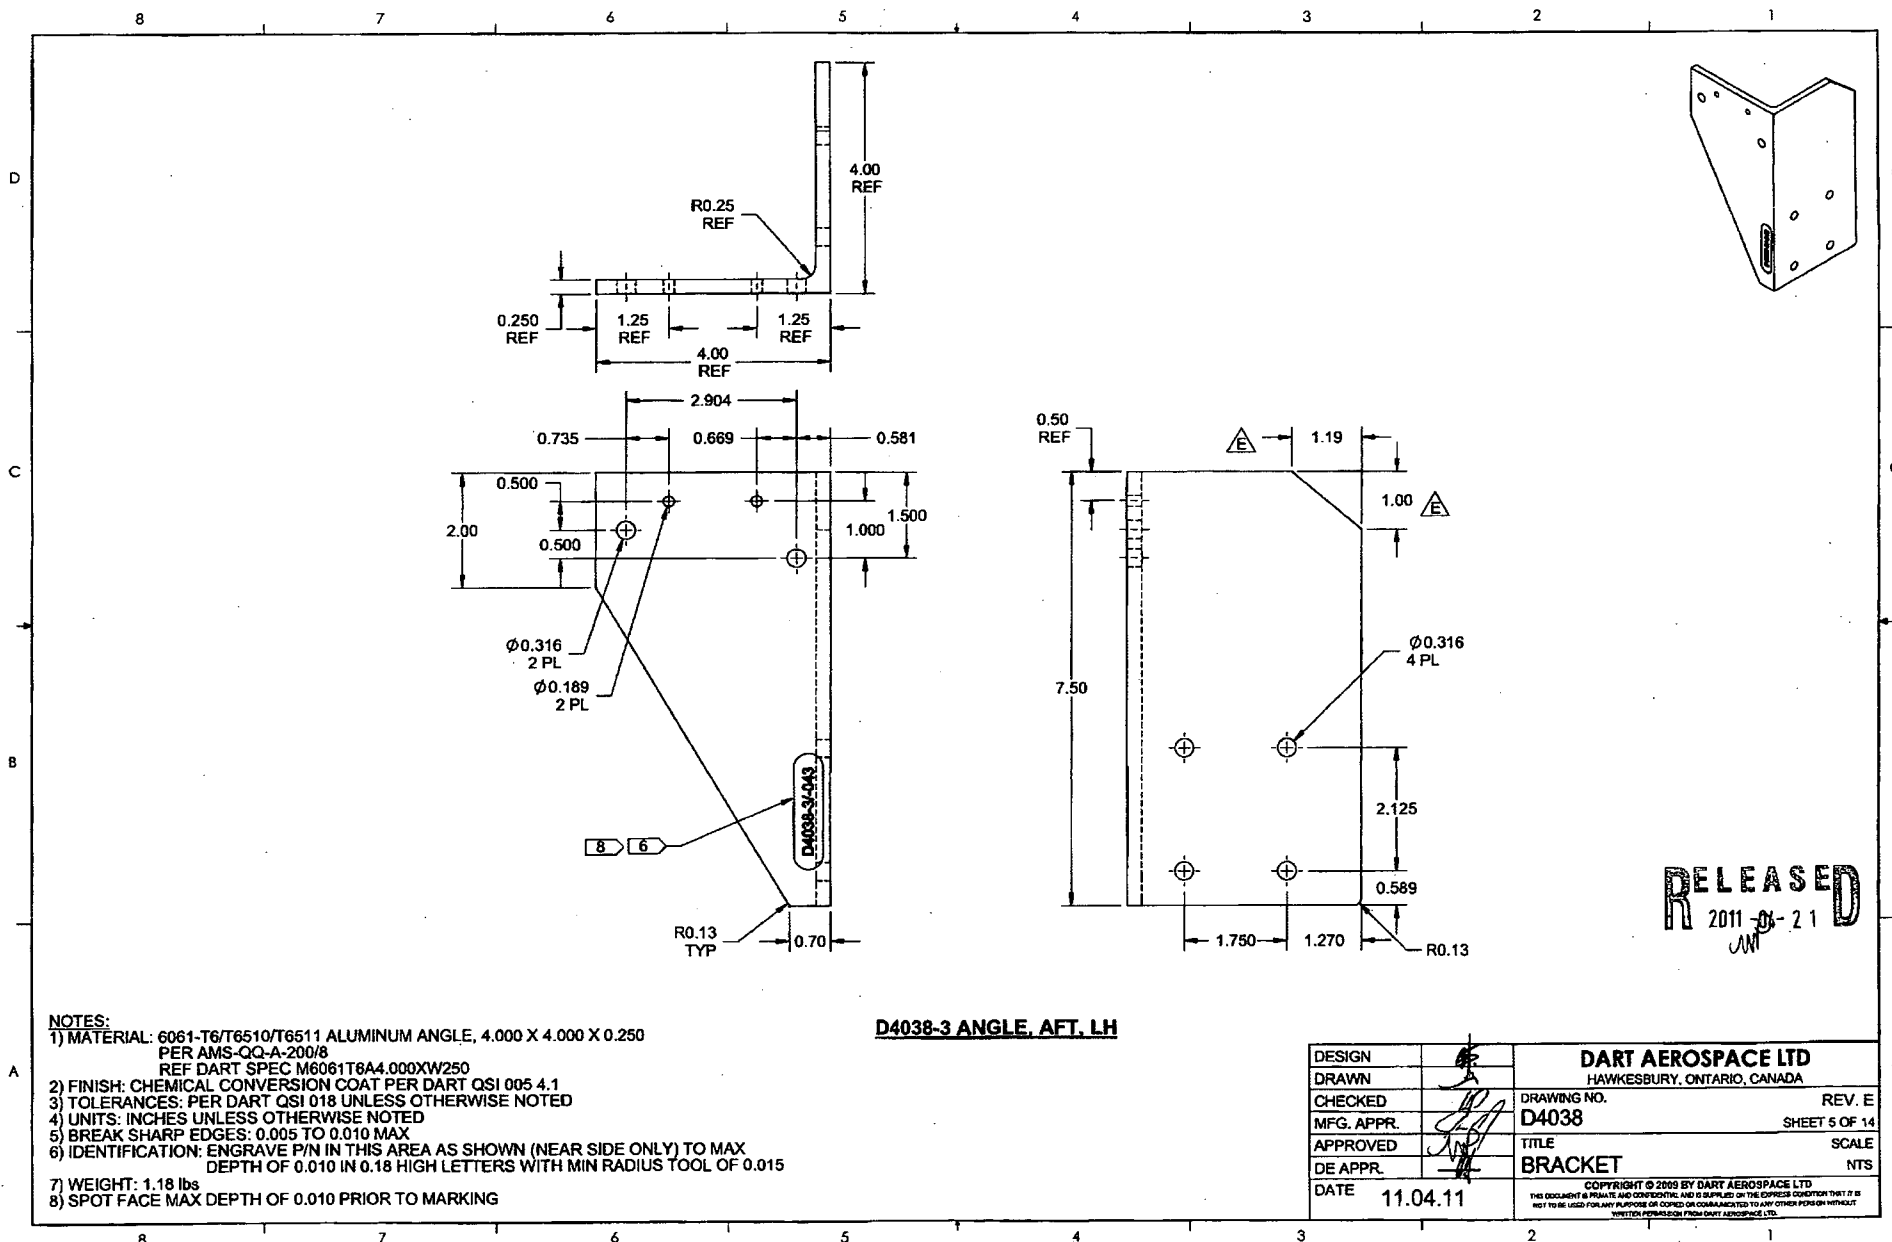


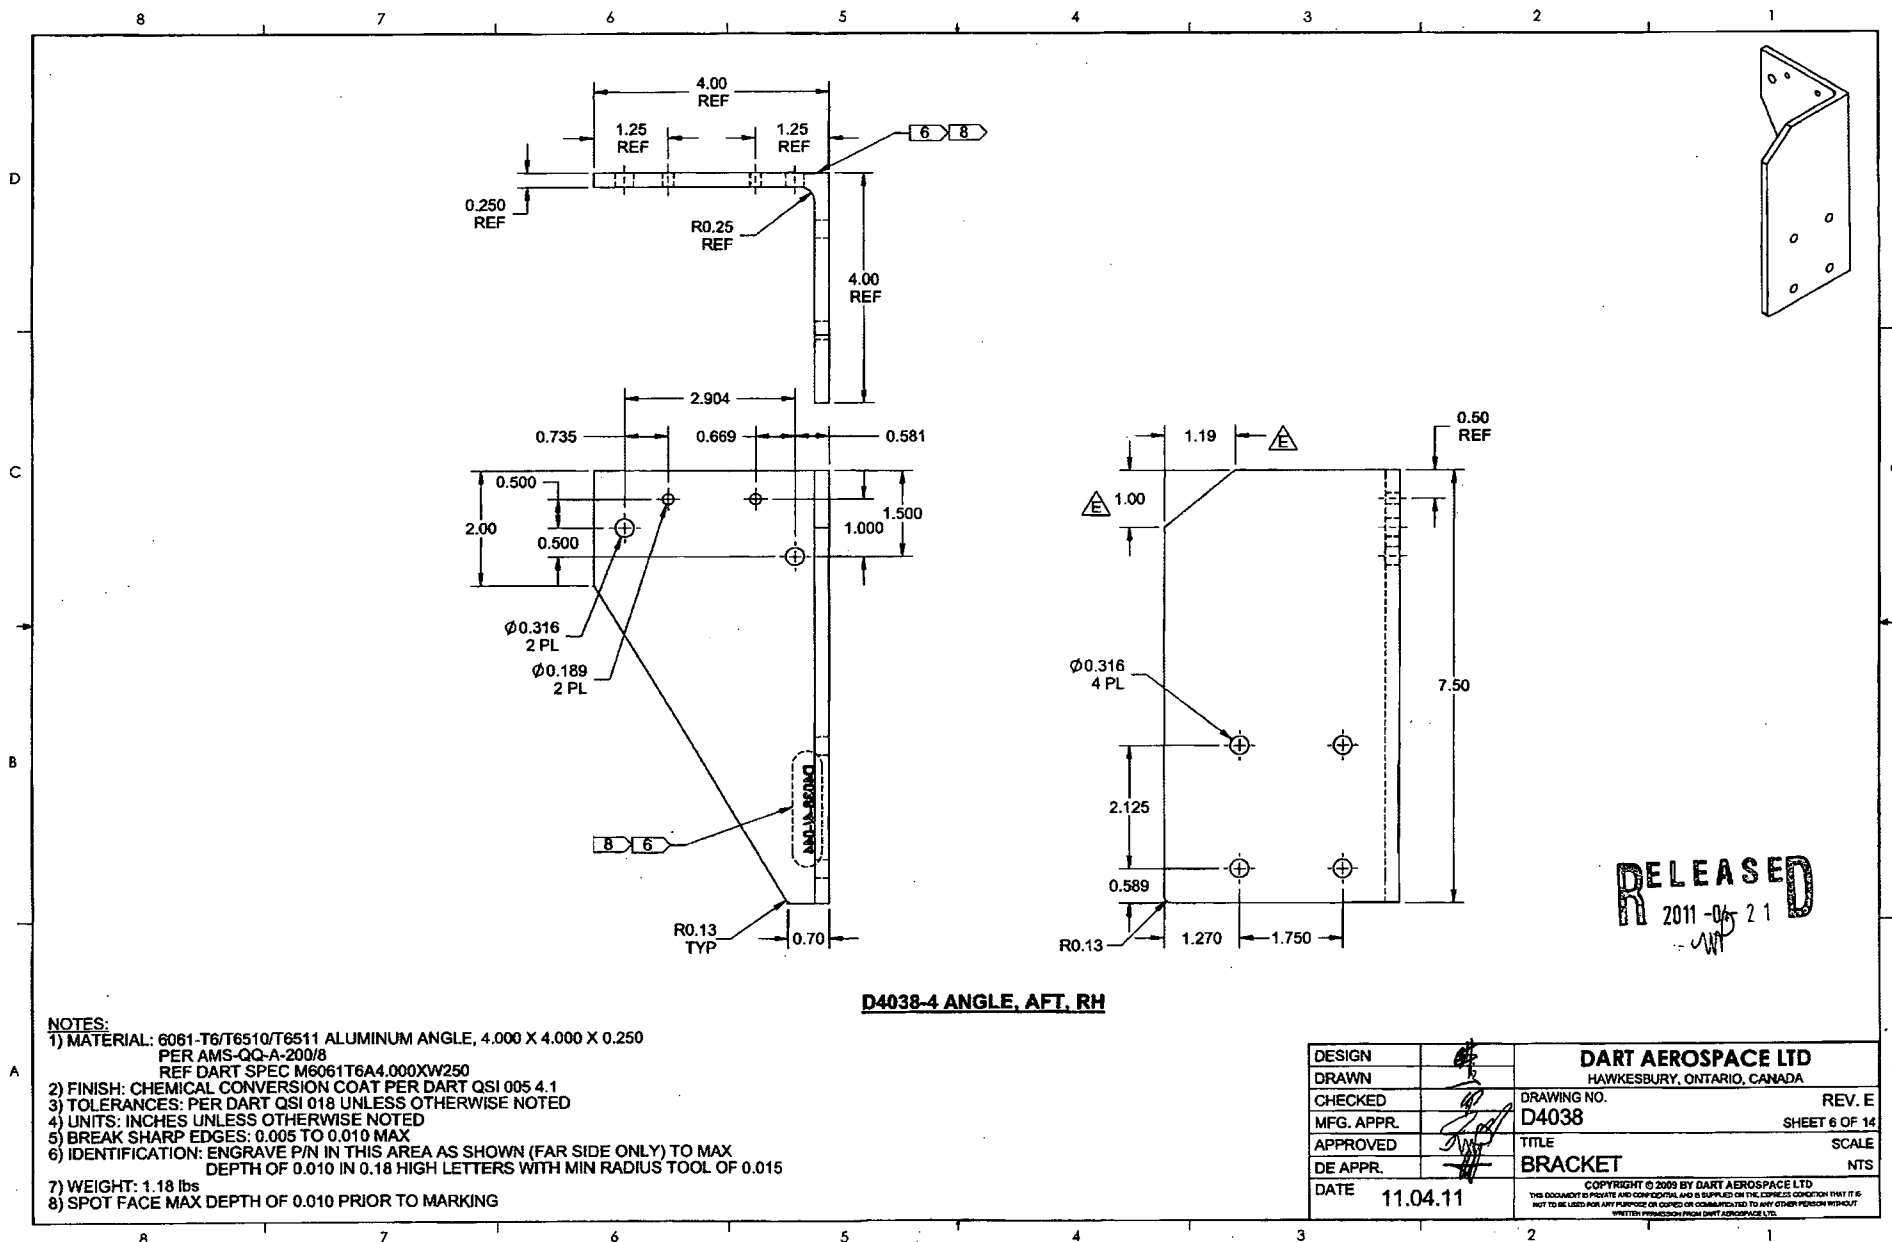

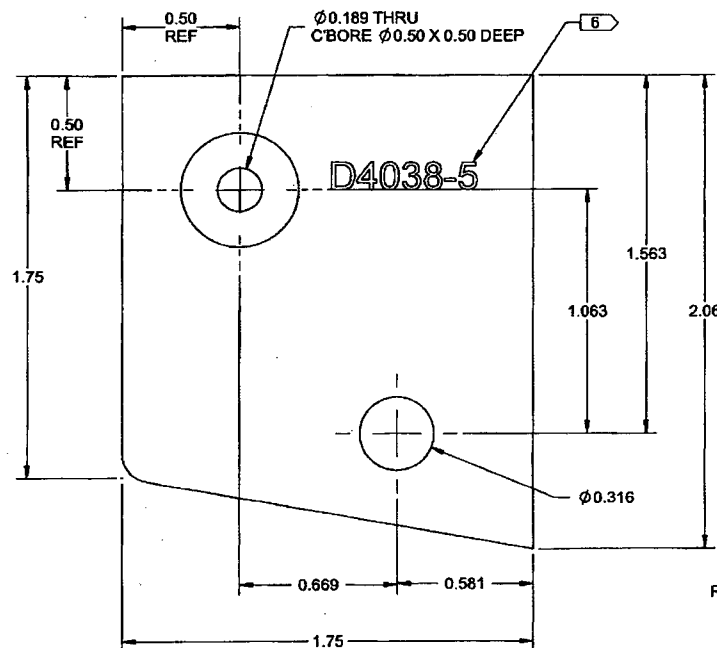

R0.13
TYP

D4038-5 BLOCK

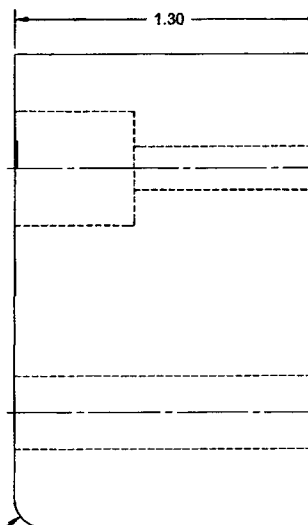


RELEASED
2011-04-20

NOTES:


- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 0.40 lbs

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. E
MFG. APPR.		D4038	SHEET 7 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	11.04.11	COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

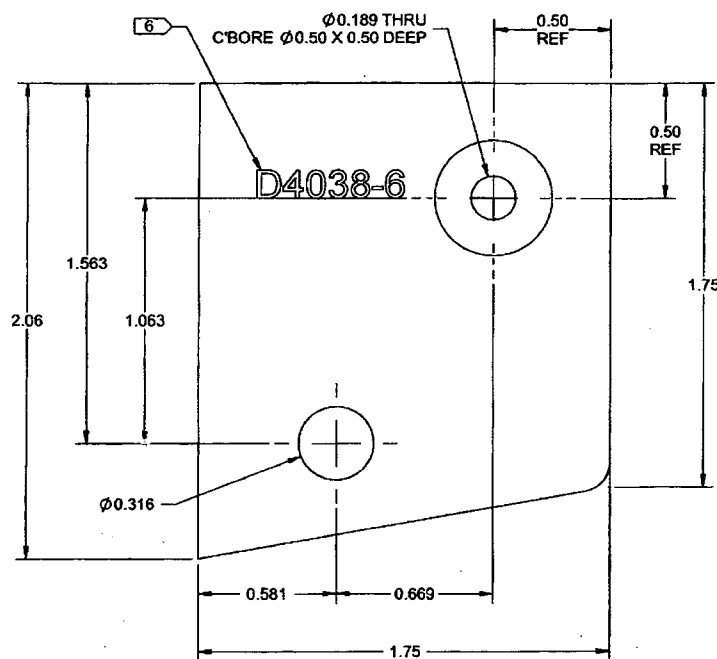

R0.13
TYP

D4038-6 BLOCK







RELEASED
R 2011-04-23
MJP

NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M8061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 0.40 lbs

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. E
MFG. APPR.		D4038	SHEET 8 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	11.04.11	<small>COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COMBINED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

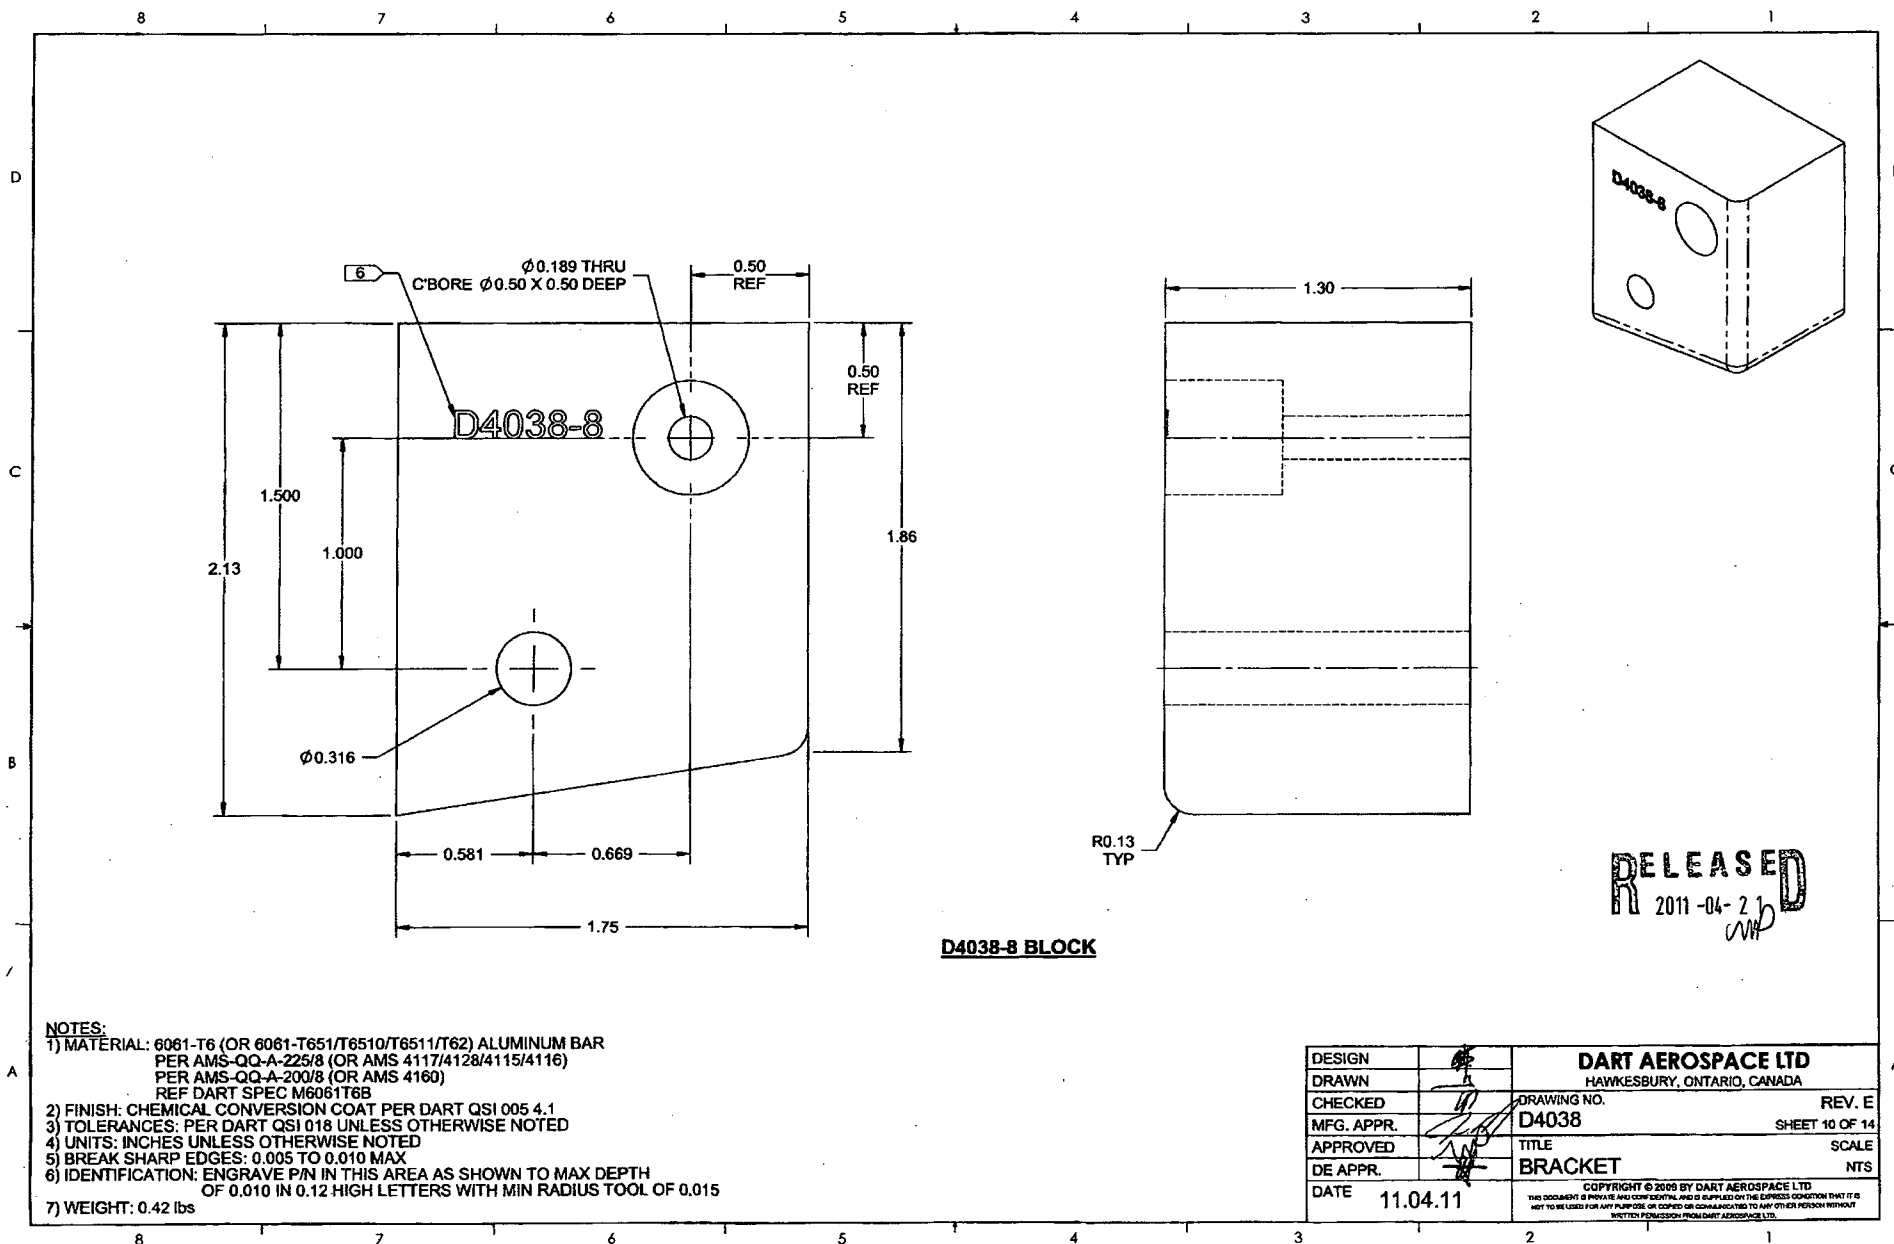

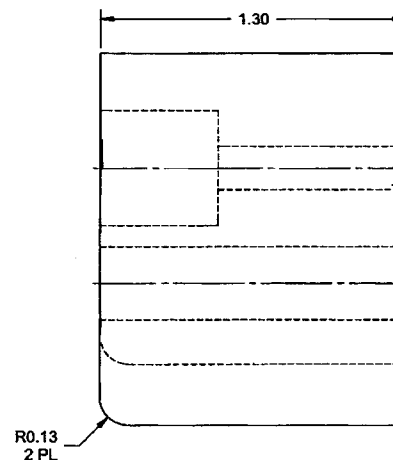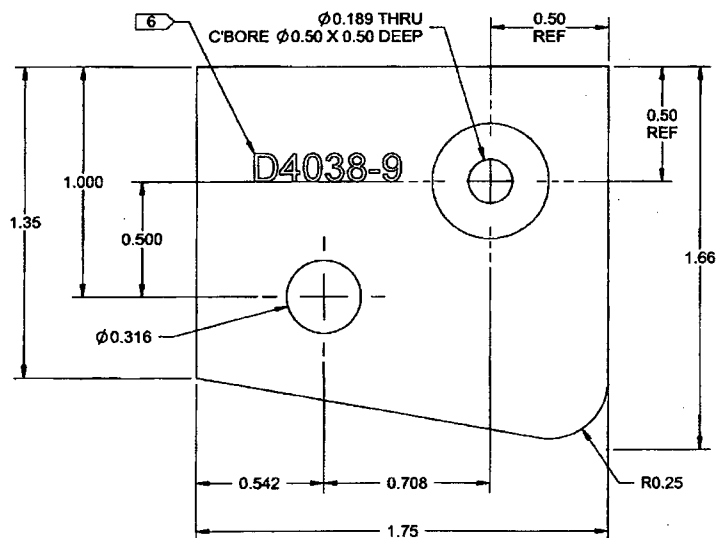


D4038-9 BLOCK




NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 0.31 lbs

DESIGN		DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA		
DRAWN				
CHECKED			DRAWING NO.	REV. E
MFG. APPR.			D4038	SHEET 11 OF 14
APPROVED			TITLE	SCALE
DE APPR.			BRACKET	NTS
DATE	11.04.11		COPYRIGHT © 2009 BY DART AEROSPACE LTD <small>THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

RELEASED
R 2011-04-21

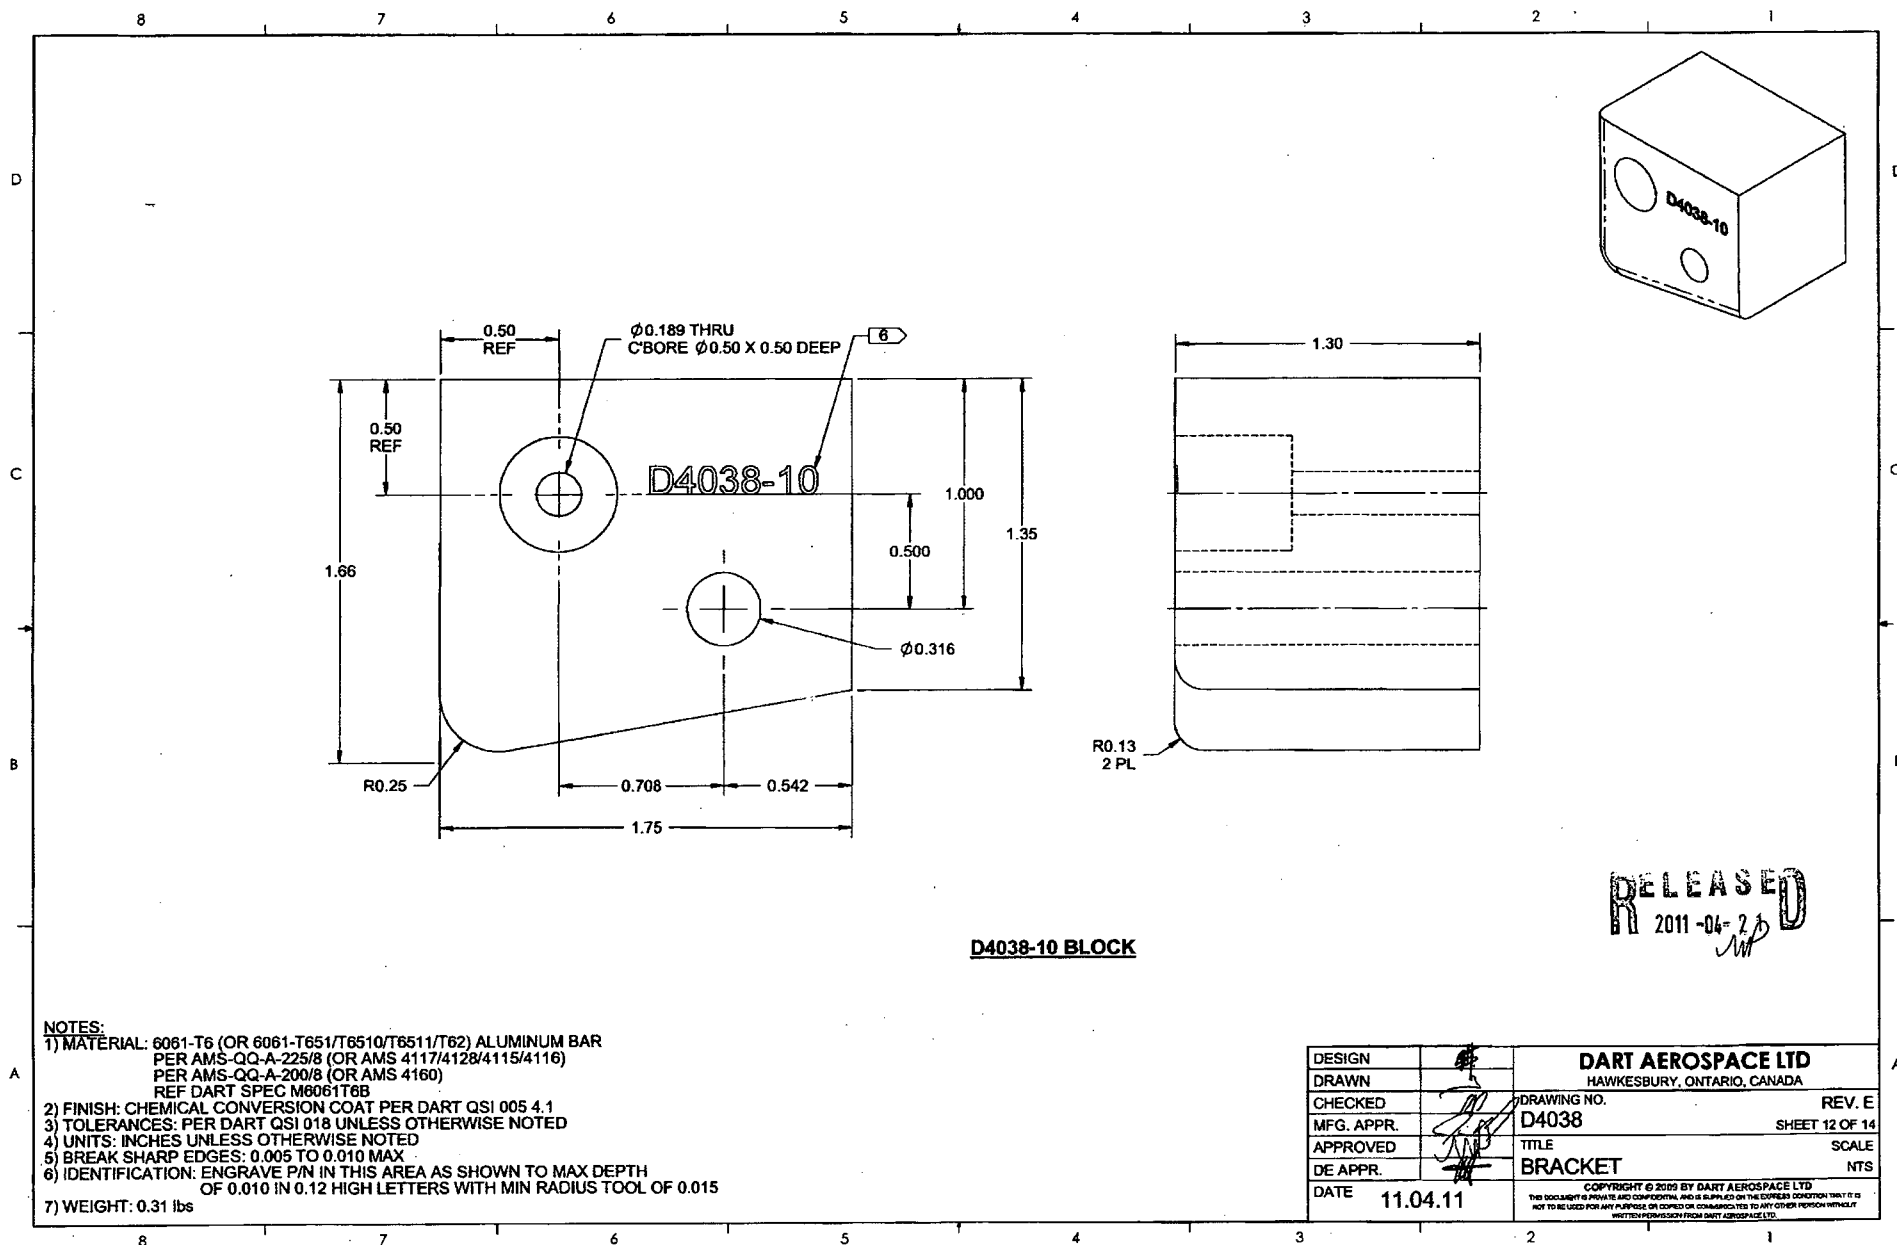

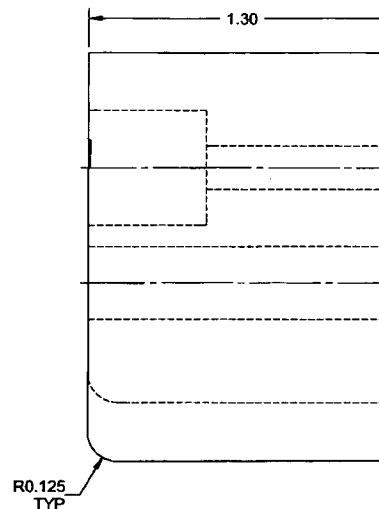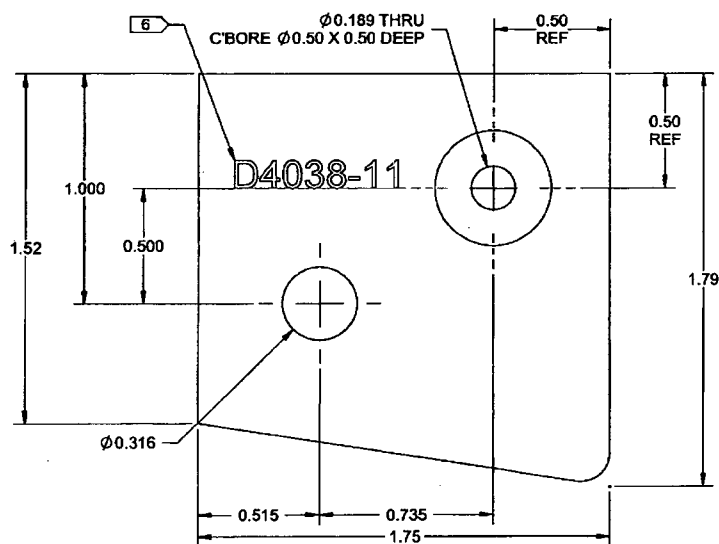




D4038-11 BLOCK

RELEASED
2011-04-23

NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/8 (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/8 (OR AMS 4160)
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 0.34 lbs

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. E
MFG. APPR.		D4038	SHEET 13 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	11.04.11	<small>COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

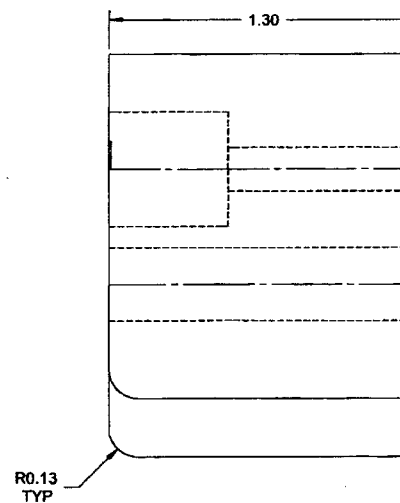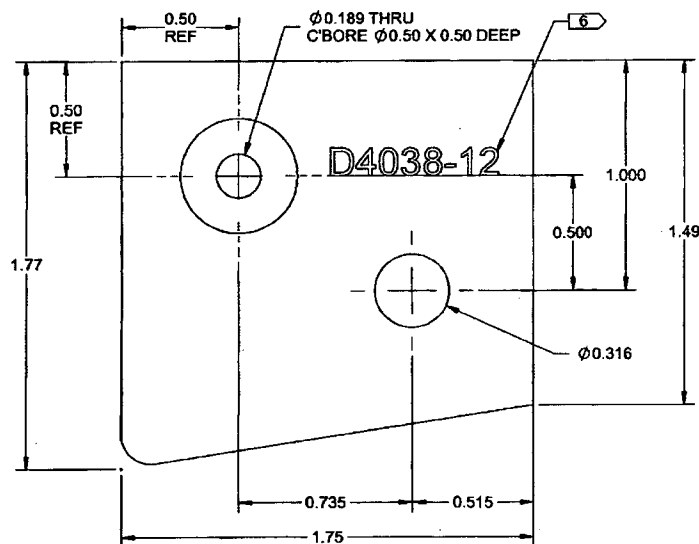

D4038-12 BLOCK

NOTES:

- 1) MATERIAL: 6061-T6 (OR 6061-T651/T6510/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/B (OR AMS 4117/4128/4115/4116)
PER AMS-QQ-A-200/B (OR AMS 4160)
REF DART SPEC M6061T6B
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: ENGRAVE P/N IN THIS AREA AS SHOWN TO MAX DEPTH
OF 0.010 IN 0.12 HIGH LETTERS WITH MIN RADIUS TOOL OF 0.015
- 7) WEIGHT: 0.34 lbs

RELEASED
2011-04-21

DESIGN		DART AEROSPACE LTD	
DRAWN		HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. E
MFG. APPR.		D4038	SHEET 14 OF 14
APPROVED		TITLE	SCALE
DE APPR.		BRACKET	NTS
DATE	11.04.11	<small>COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	